




MECOFLOCK® 3D flocking

High-performance flocking adhesive
for automotive applications

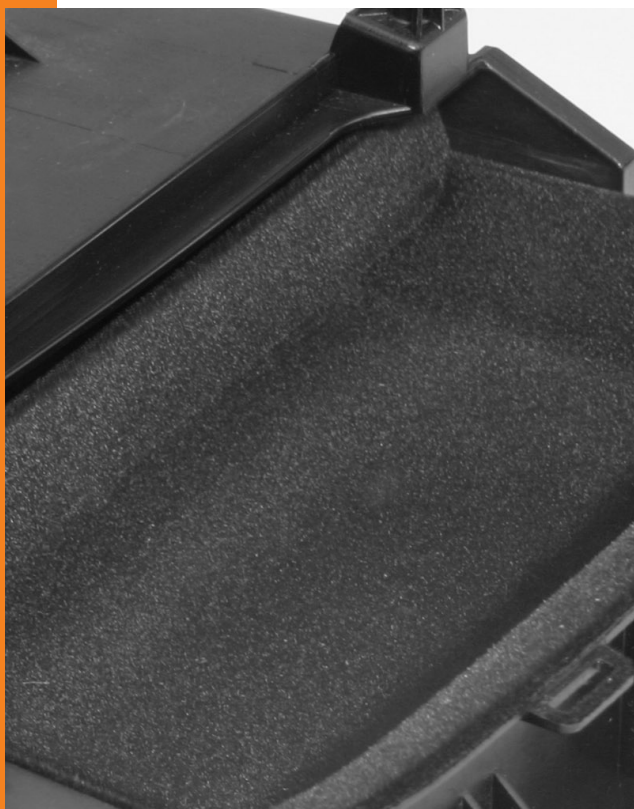

Product benefits

- excellent adhesion on various substrates
- ABS, ABS-PC, PP pre-treated (surface tension >38 mN/M)
- high solids content
- outstanding spraying properties
- reduced overspray
- optimised open time

MECOFLOCK® 3D flocking

Properties:

Product	Basis	Processing method 1-2 C	Pot life (h)	Open time (min)	Application method*	Drying curing (°C)	Colour	Hardener systems	Key advantage
MECOFLOCK® D 453/5-09	Acrylate dispersion	1-2	4-8	3-5	1	20-80	black	MECODUR® H 5580	Multifunctional use for wood, metals and acrylic glass
MECOFLOCK® D 466 LE	Acrylate dispersion	1	-	3-5	1	80	black	-	1K; optimized emissions and odor, fulfills DBL 5430
MECOFLOCK® L 860	Polyurethane base	2	12	15-30	1-2-3	20-80	grey	MECODUR® L 5560/1	fast to water, oil, grease and acid media

*** Application methods:**

- 1 Spraying
- 2 Rolling
- 3 Brushing, painting

Ask for a sample to be convinced by hands-on-tests!

Adhesives by KIWO®

Screen adhesives

- solvent-based
- UV-curing

Screen printable adhesives

- water-based
- solvent-based
- UV-curing

Special adhesives

- spray adhesives
- flock adhesives
- laminating adhesives
- printing blanket adhesives

KIWO
ONLINE

